


KILDARE COUNTY COUNCIL

COMMUNITY COMPOSTER

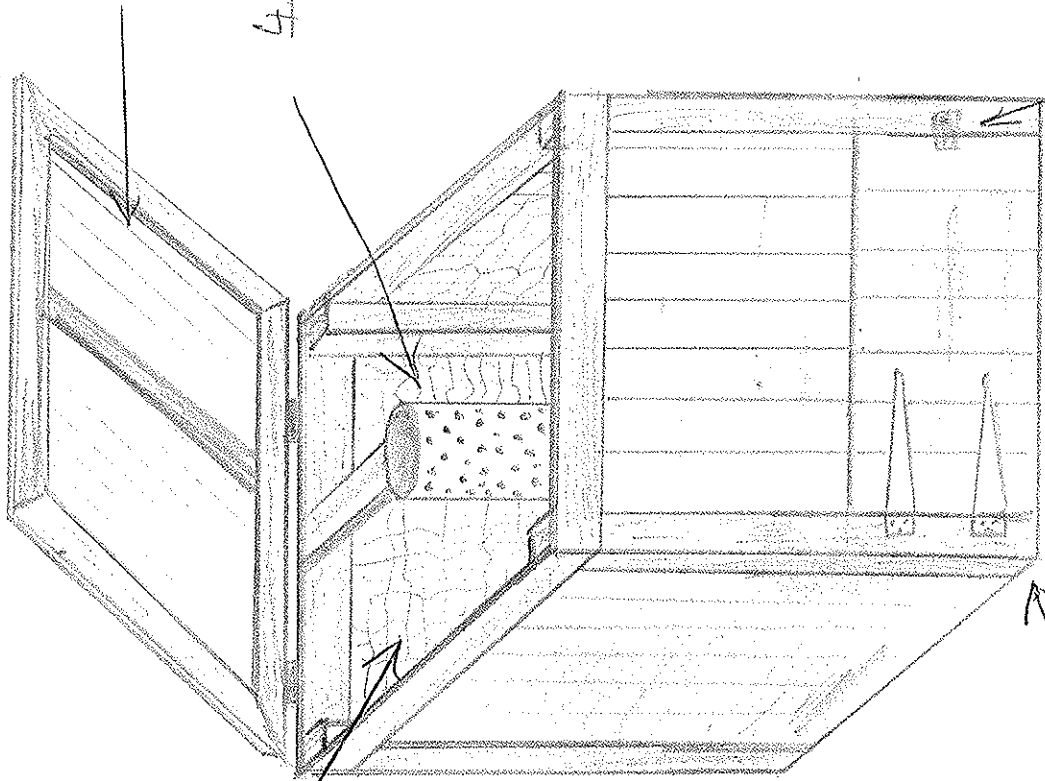

BIN SHOULD BE FULLY COATED IN LINSEED OIL (WELWINK CUT ENDS) AND TREATED ONCE A YEAR TO PRESERVE IT

UNITS CAN BE BUILT AS ONE, TWO, THREE, FOUR BAY (OR EVEN MORE) SIDES AND LIDS CAN BE PRE-ASSEMBLED AND THEN THE UNIT CONSTRUCTED ON-SITE

WOODEN FRAME LID WITH SHAKER-PROOF PERSEXY - THIS ALLOWS LIGHT IN WITHOUT ADDING MUCH WEIGHT

4 INCH W/AIN PIPE

PERFORATED WITH A DRILL TO ALLOW AIR TO CIRCULATE

PIPE SHOULD BE

FIXED TO RACK WALL USING PIECE OF TIMBER AND L BRACKETS

UNITS SHOULD SIT DIRECTLY ON THE GROUND -

A LAYER OF TWIGS SHOULD BE PLACED IN THE BOTTOM OF THE BIN

INSIDE LINED WITH CHICKEN WIRE

HINGES CAN BE

PLACED ON EITHER SIDE

SIMPLE WOODEN CATCH